



brighter reflections

 **ALMAZ-LUX**
LED MIRRORS

Factory Almaz-Lux produces all types of mirrors for bathrooms, bedrooms, halls, restaurants, cafes and elevator zones. Our company uses up-to-date equipment, follows modern production technologies, has highly qualified employees and cooperates with famous designers.

Here are some more facts about Almaz-Lux:

- situated in Bobruisk (Belarus)
- 30 year in the market
- production volume 250.000 m² of mirrors
- annual turnover is more than 3.000.000 EUR

Almaz-Lux delivers mirrors to Russia, Germany, Baltic countries, Hungary, Kazakhstan and Cuba. We sell our mirrors under our own trademark, while we also work as a contract manufacturer and produce exclusive models with the trademark of our customers.

We have different types of packing: a standard one for the supermarkets of DIY format and a shockproof packing for the internet shops. Safe transportation is guaranteed.

Our production complies with the requirements of ISO 9001. LED mirrors have CE mark and RoHS certification.

We speak Russian, English, Italian and Polish languages and we will be happy to cooperate with you.



Irina Zhiharevich
 Managing Director Europe
 Proudly with Almaz-Lux since 2007

Irina.Zhiharevich@almaz-lux.by
 mob.:+375 29 673 70 73, fax: +375 225 77 60 17
almaz-lux.by **almaz-luks.by**
 Spartakovskaya Str. 7-2, Bobruisk, 213802 Belarus



LED lightening



horizontally/vertically



installed clock



touch switch



item can be exploited in other sizes



installed magnifying mirror



switch button



waterproof coefficient ip44



anti-fog



environmentally friendly





waterproof coefficient ip20



EU standards

ZP-13

open light

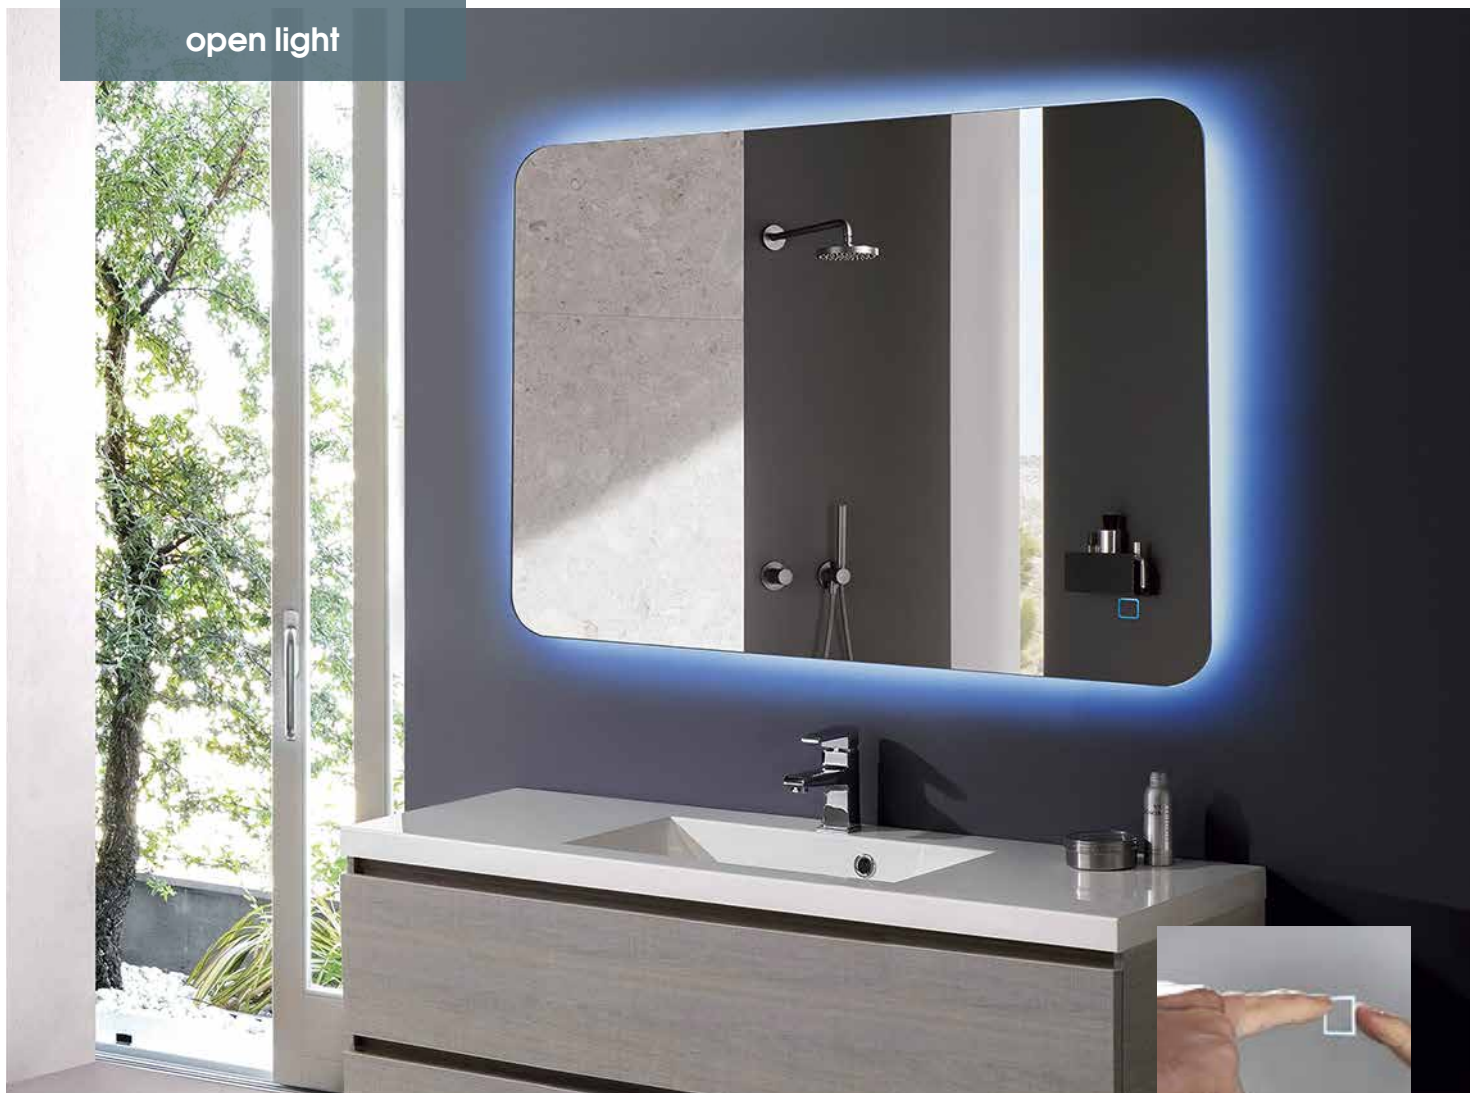

	ZP-13	ZP-11	ZP-63
Sizes, mm	800 x 600	1000 x 600	1000 x 800
Supply voltage	220-230V 50/60Hz	220-230V 50/60Hz	220-230V 50/60Hz
Power consumption, W	27	35	43
Degree of protection	IP44	IP44	IP44
Light color	6500 (CW)	6500 (CW)	6500 (CW)
Brightness, Lumen	3000	3600	4200



Basic functions




Additional functions




ZP-25

open light

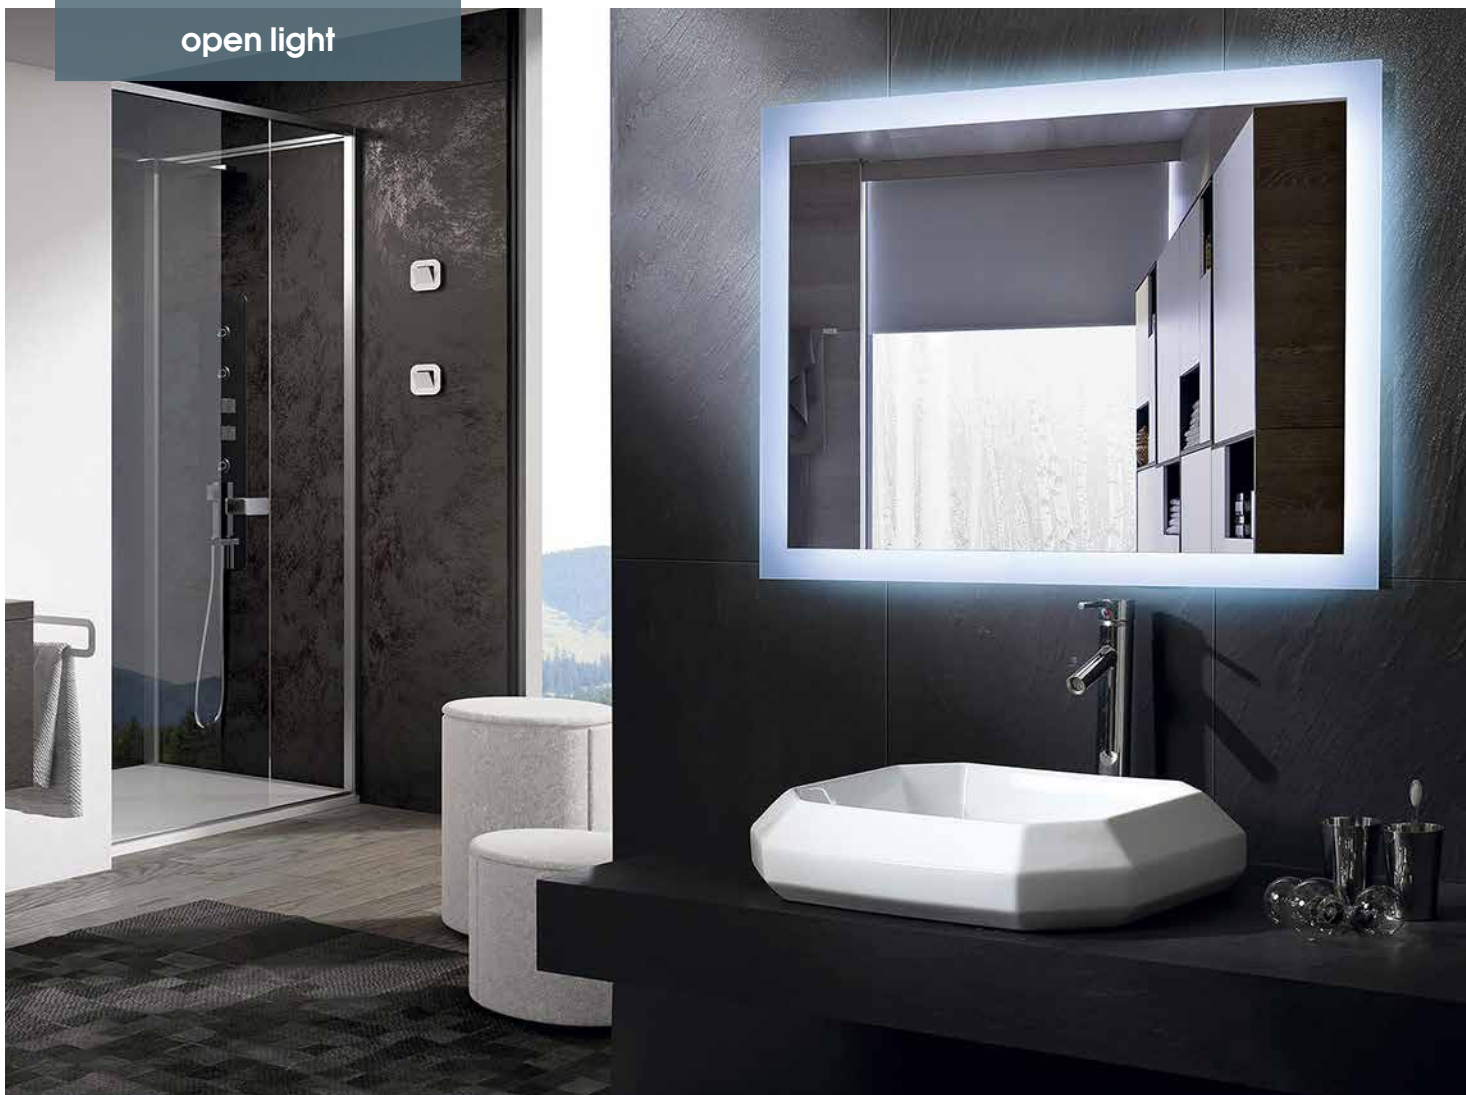

ZP-25	
Sizes, mm	800 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	22
Degree of protection	IP44
Light color	6500 (CW)
Brightness, Lumen	1250

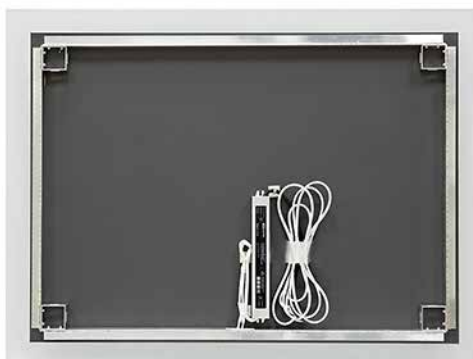

Basic functions



Additional functions



ZP-44

open light



	ZP-42	ZP-43	ZP-44	ZP-61	ZP-62
Sizes, mm	1000 x 600	800 x 600	1200 x 600	600 x 400	1400 x 600
Supply voltage	220-230V 50/60Hz	220-230V 50/60Hz	220-230V 50/60Hz	220-230V 50/60Hz	220-230V 50/60Hz
Power consumption, W	26	22	30	30	34
Degree of protection	IP44	IP44	IP44	IP44	IP44
Light color	6500 (CW)	6500 (CW)	6500 (CW)	6500 (CW)	6500 (CW)
Brightness, Lumen	1300	1100	1550	1550	1750



Basic functions





Additional functions



ZP-64

open light

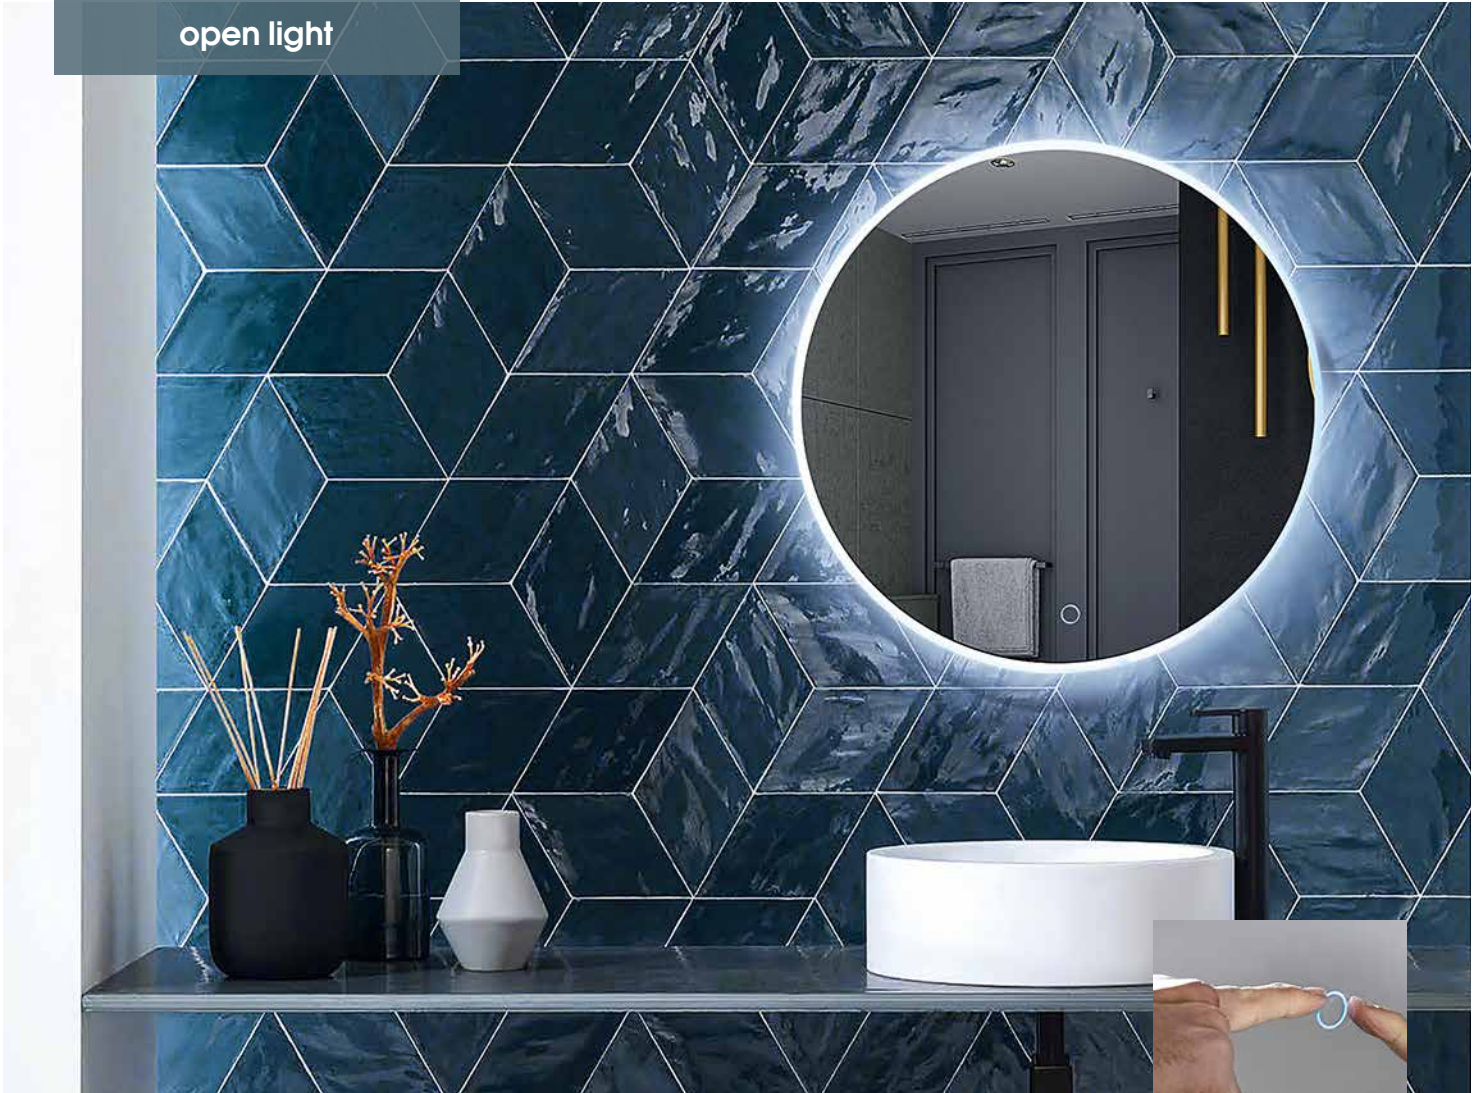

ZP-64	
Sizes, mm	D 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	17
Degree of protection	IP44
Light color	6000 (CW)
Brightness, Lumen	960



Basic functions





Additional functions




ZP-65

open light

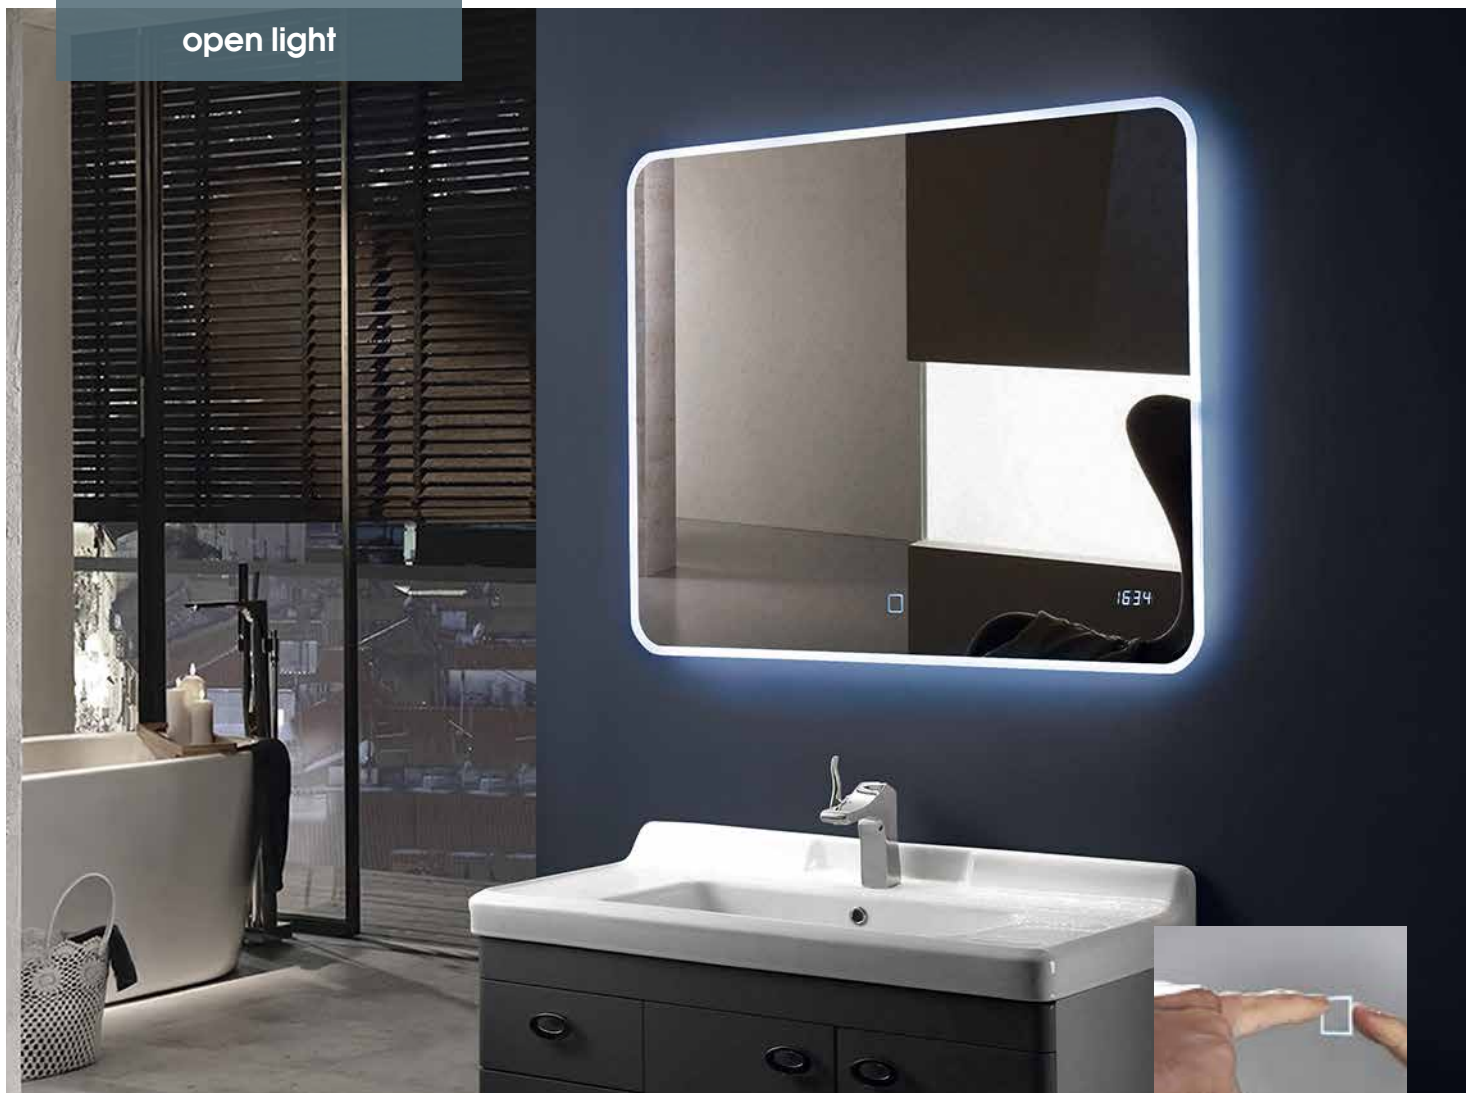

ZP-65	
Sizes, mm	800 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	24
Degree of protection	IP44
Light color	6500 (CW)
Brightness, Lumen	1300

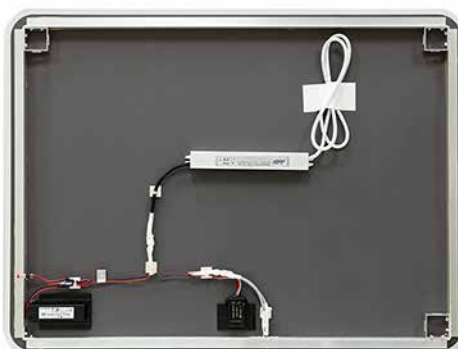

Basic functions



Additional functions




ZP-66

open light





ZP-66	
Sizes, mm	800 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	22
Degree of protection	IP44
Light color	6500 (CW)
Brightness, Lumen	1250

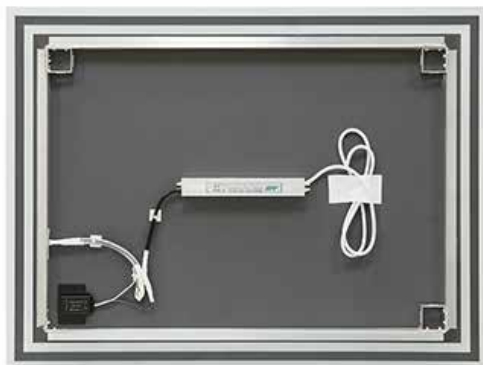

Basic functions




Additional functions



ZP-67

open light

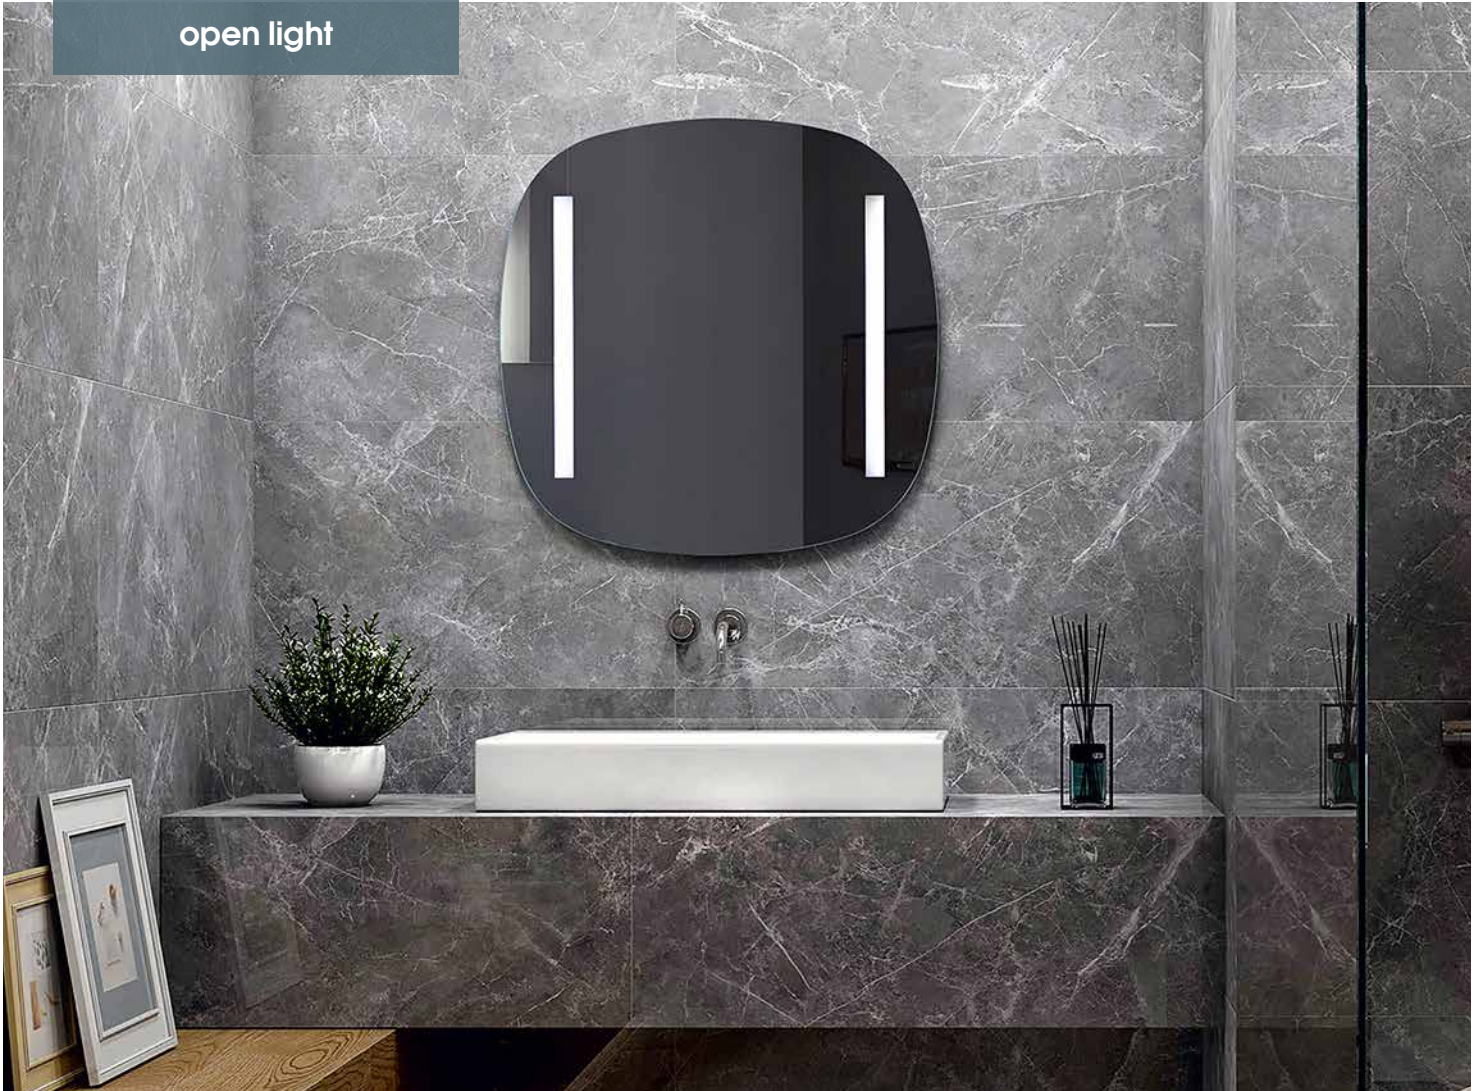

ZP-67	
Sizes, mm	700 x 700
Supply voltage	220-230V 50/60Hz
Power consumption, W	9
Degree of protection	IP44
Light color	6000 (CW)
Brightness, Lumen	500



Basic functions



Additional functions



ZP-70

open light



	ZP-70	ZP-69
Sizes, mm	1000 x 600	600 x 800
Supply voltage	220-230V 50/60Hz	220-230V 50/60Hz
Power consumption, W	25	21
Degree of protection	IP44	IP44
Light color	6500 (CW)	6500 (CW)
Brightness, Lumen	1450	1200



Basic functions



Additional functions



ZP-76

open light





ZP-76	
Sizes, mm	D 650
Supply voltage	220-230V 50/60Hz
Power consumption, W	18
Degree of protection	IP44
Light color	6500 (CW)
Brightness, Lumen	990

Basic functions




Additional functions



ZP-90

open light



ZP-90	
Sizes, mm	900 x 690
Supply voltage	220-230V 50/60Hz
Power consumption, W	22
Degree of protection	IP44
Light color	6500 (CW)
Brightness, Lumen	1250



Basic functions




Additional functions



ZP-101

open light



ZP-101	
Sizes, mm	1000 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	17
Degree of protection	IP44
Light color	6500 (CW)
Brightness, Lumen	1000



Basic functions




Additional functions



ZP-32

translucent plastic box



ZP-32	
Sizes, mm	800 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	24
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1300



Basic functions



Additional functions




ZP-48

translucent plastic box



ZP-48	
Sizes, mm	800 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	24
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1300



Basic functions





Additional functions



ZP-51

translucent plastic box

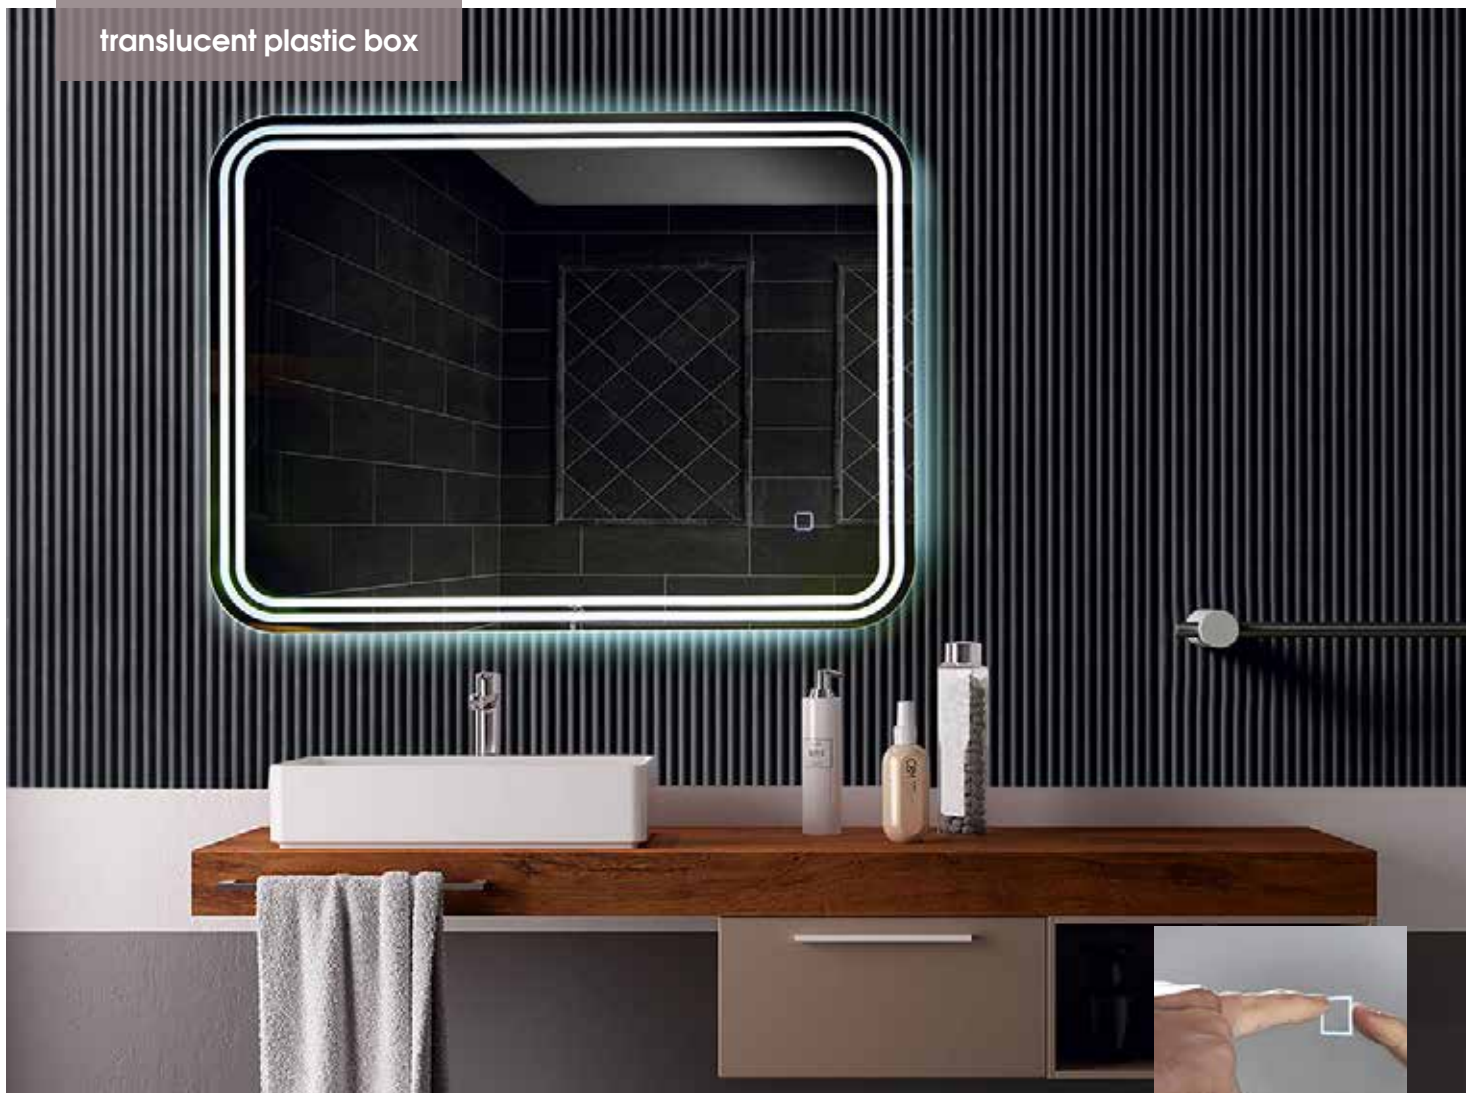

ZP-51	
Sizes, mm	800 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	24
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1300



Basic functions




Additional functions



ZP-77

translucent plastic box



ZP-77	
Sizes, mm	D 650
Supply voltage	220-230V 50/60Hz
Power consumption, W	16
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	900



Basic functions




Additional functions



ZP-80

translucent plastic box



ZP-80	
Sizes, mm	770 x 570
Supply voltage	220-230V 50/60Hz
Power consumption, W	18
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1000



Basic functions



Additional functions




ZP-117

translucent plastic box



ZP-117	
Sizes, mm	982 x 582
Supply voltage	220-230V 50/60Hz
Power consumption, W	20
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1100



Basic functions



Additional functions




ZP-41

opaque plastic box



ZP-41	
Sizes, mm	1000 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	28
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1550



Basic functions




Additional functions



ZP-45

opaque plastic box

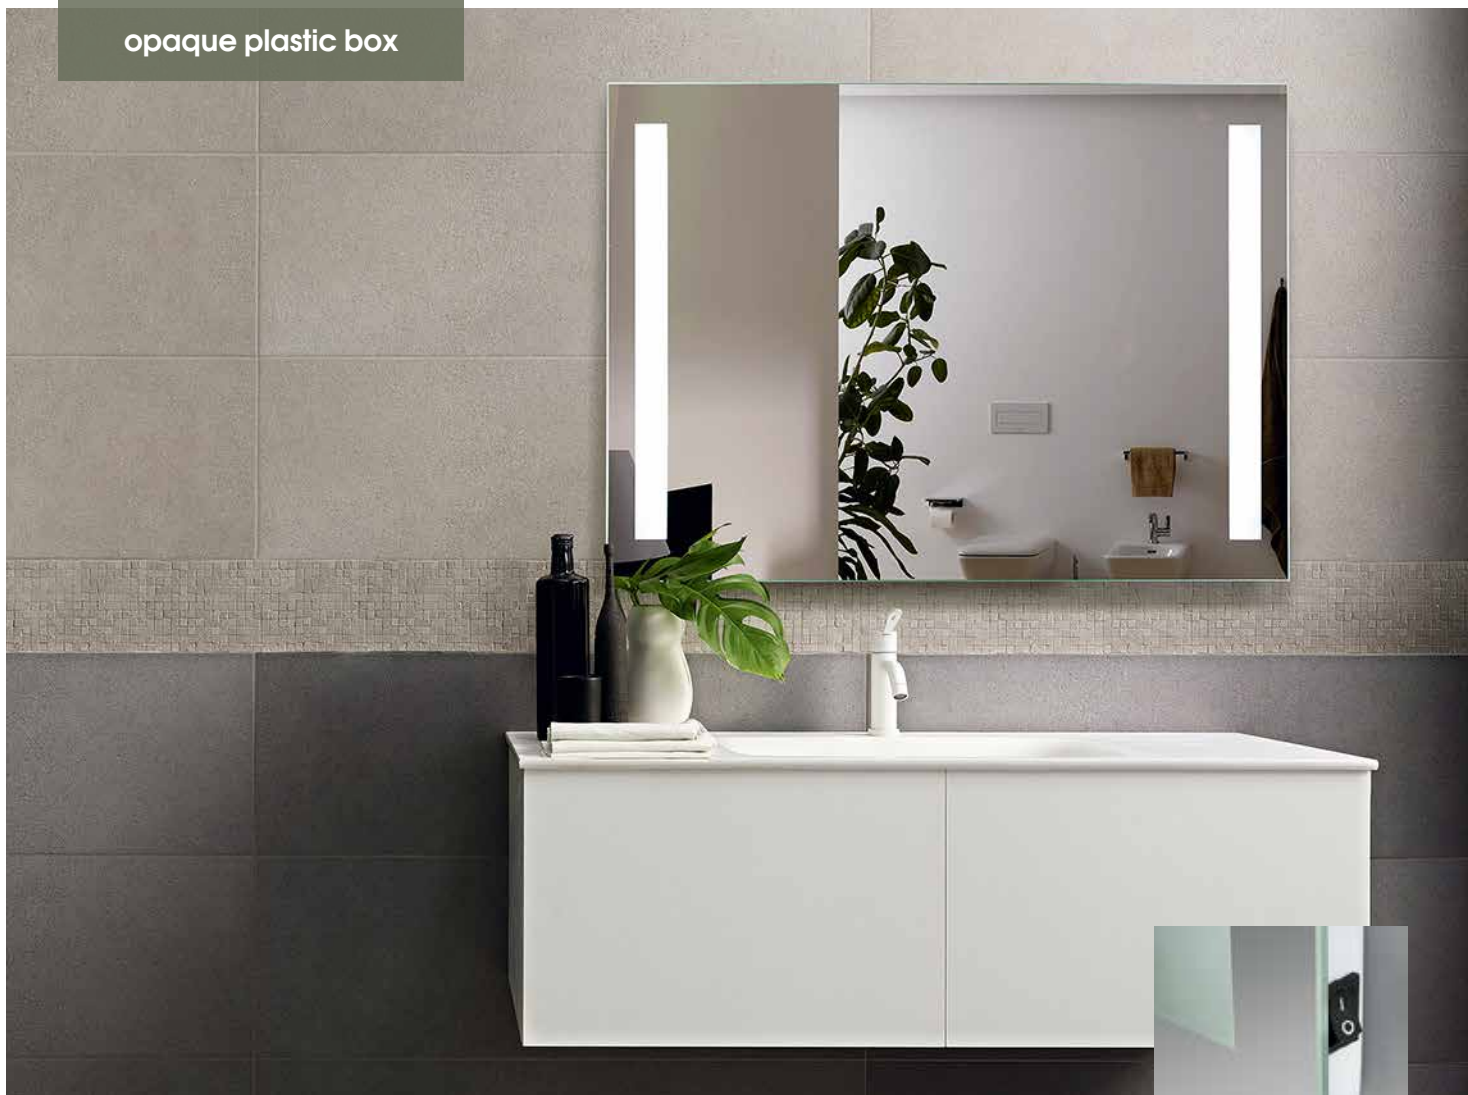

ZP-45	
Sizes, mm	745 x 540
Supply voltage	220-230V 50/60Hz
Power consumption, W	10
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	550

Basic functions




Additional functions



ZP-46

opaque plastic box

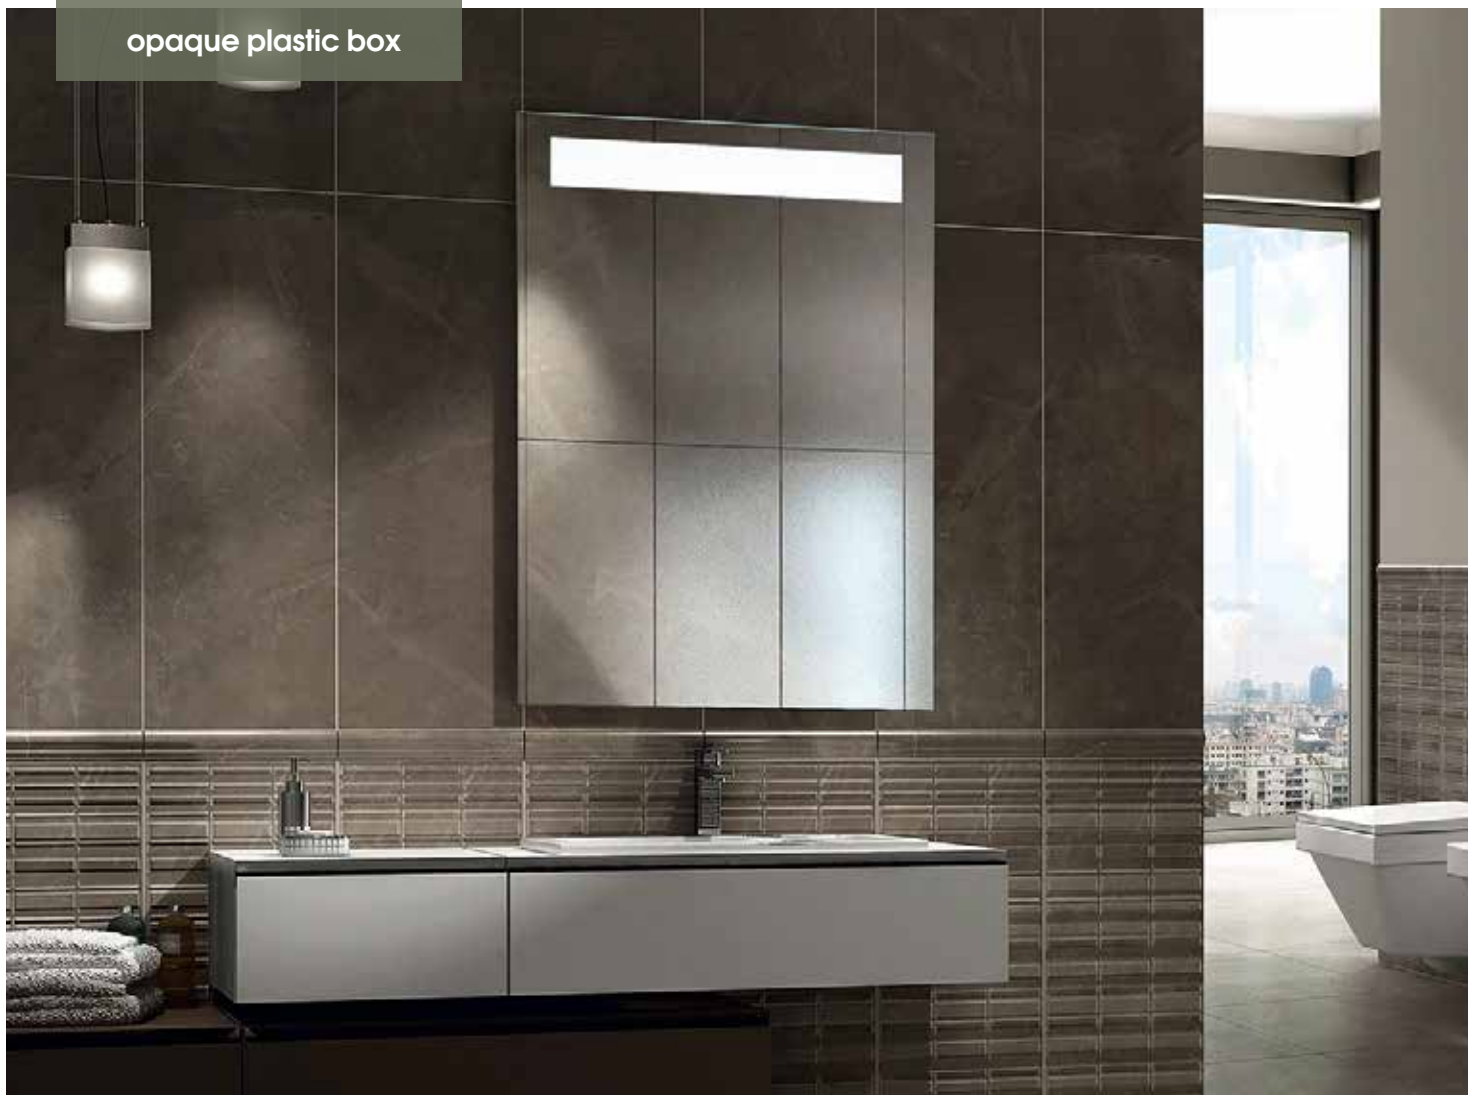

ZP-46	
Sizes, mm	735 x 530
Supply voltage	220-230V 50/60Hz
Power consumption, W	5
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	270

Basic functions




Additional functions




ZP-53

opaque plastic box

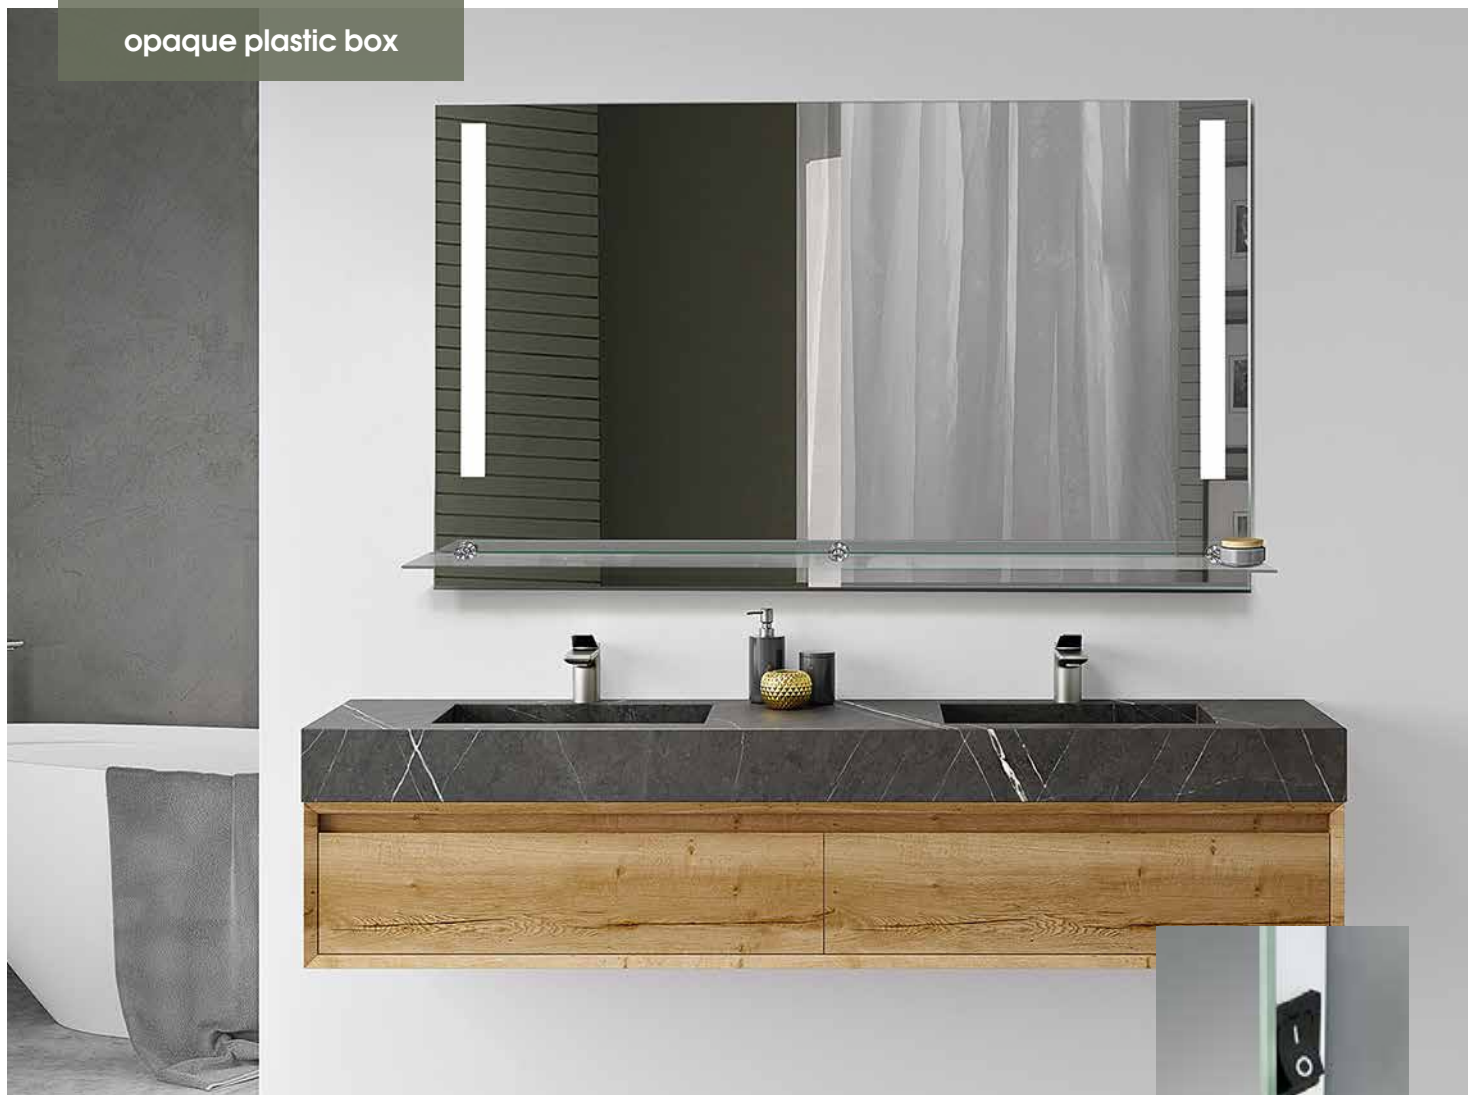

	ZP-52	ZP-53
Sizes, mm	800 x 600	1000 x 600
Supply voltage	220-230V 50/60Hz	220-230V 50/60Hz
Power consumption, W	9	9
Degree of protection	IP20	IP20
Light color	6000 (CW)	6000 (CW)
Brightness, Lumen	550	550

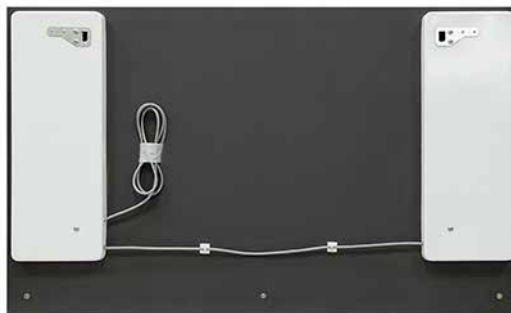

Basic functions





Additional functions



ZP-55

opaque plastic box

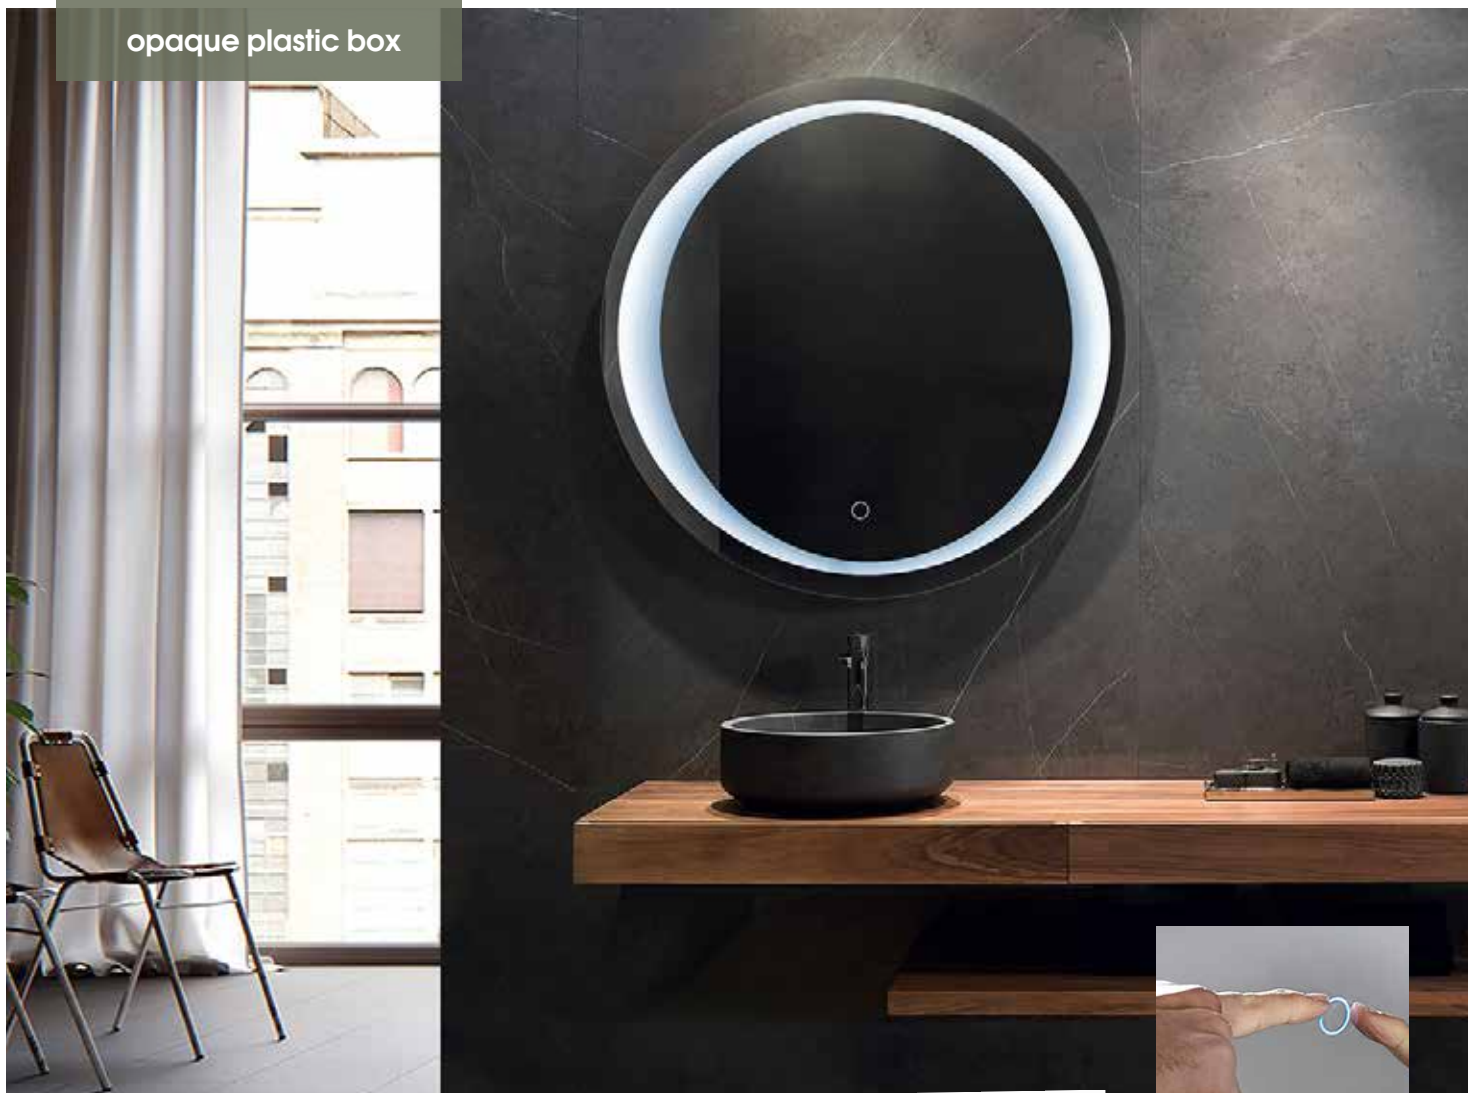

ZP-55	
Sizes, mm	D 650
Supply voltage	220-230V 50/60Hz
Power consumption, W	20
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1100



Basic functions




Additional functions




ZP-56

opaque plastic box

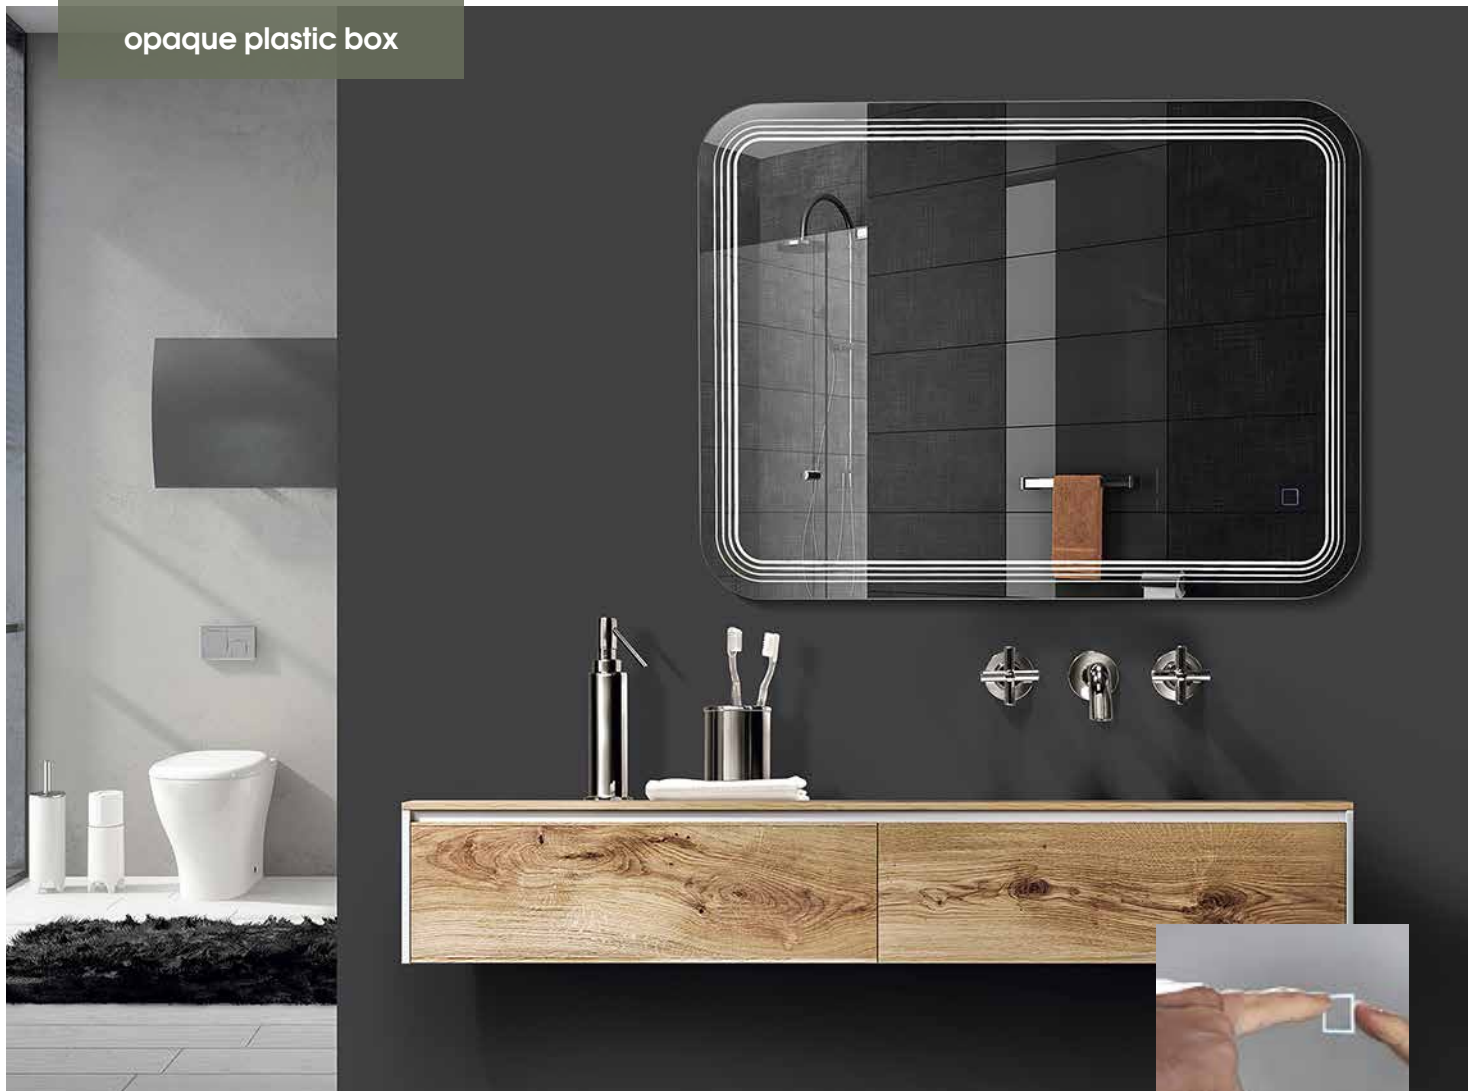

	ZP-56	ZP-57
Sizes, mm	800 x 600	1045 x 600
Supply voltage	220-230V 50/60Hz	220-230V 50/60Hz
Power consumption, W	24	24
Degree of protection	IP20	IP20
Light color	6000 (CW)	6000 (CW)
Brightness, Lumen	1300	1300



Basic functions



Additional functions



ZP-79

opaque plastic box



ZP-79	
Sizes, mm	D 650
Supply voltage	220-230V 50/60Hz
Power consumption, W	16
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	900



Basic functions



Additional functions



ZP-81

opaque plastic box




ZP-81	
Sizes, mm	900 x 700
Supply voltage	220-230V 50/60Hz
Power consumption, W	48
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1500

Basic functions




Additional functions



ZP-82

opaque plastic box



ZP-82	
Sizes, mm	800 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	24
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1300



Basic functions




Additional functions



ZP-86

opaque plastic box



ZP-86	
Sizes, mm	1000 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	37
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	2000



Basic functions




Additional functions



ZP-88

opaque plastic box



ZP-88	
Sizes, mm	800 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	24
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1300



Basic functions




Additional functions



ZP-89

opaque plastic box



ZP-89	
Sizes, mm	800 x 600
Supply voltage	220-230V 50/60Hz
Power consumption, W	26
Degree of protection	IP20
Light color	6000 (CW)
Brightness, Lumen	1450



Basic functions



Additional functions





brighter reflections

